

# P8 Printers

Faster, Smaller, Quieter, Printing Capability from Hypercom®

*Hypercom's new P8 family of printers offers higher performance, greater reliability and lower operating cost—making it superior to any other printer on the market.*

## Product Highlights:

- ✓ Bi-directional printing improves print speed.
- ✓ Quiet operation.
- ✓ Easy to load pre-printed or plain roll paper models.
- ✓ Paper out and power indicator lights.
- ✓ Extra wide 3" paper roll.
- ✓ Small footprint.
- ✓ Compatible with all Hypercom "T7" terminals.

The P8 is available as either a 40 column friction feed roll printer (P8F) or a 23 column sprocket feed printer (P8S).

The P8F roll printer helps speed transaction time with rapid paper advance and fast bi-directional, 4 lines-per-second printing.


The P8S sprocket feed printer provides a print speed of 4 lines per second on pre-printed forms.

Paper loading is simple and easy with both Hypercom printers.

Additionally, both printers provide quality receipts in a new compact, quiet design. P8 printers are powered by the terminal, eliminating the need for a separate power supply and outlet.



P8F shown in retail situation with T7E Terminal and CS70C Signature Capture PIN Pad

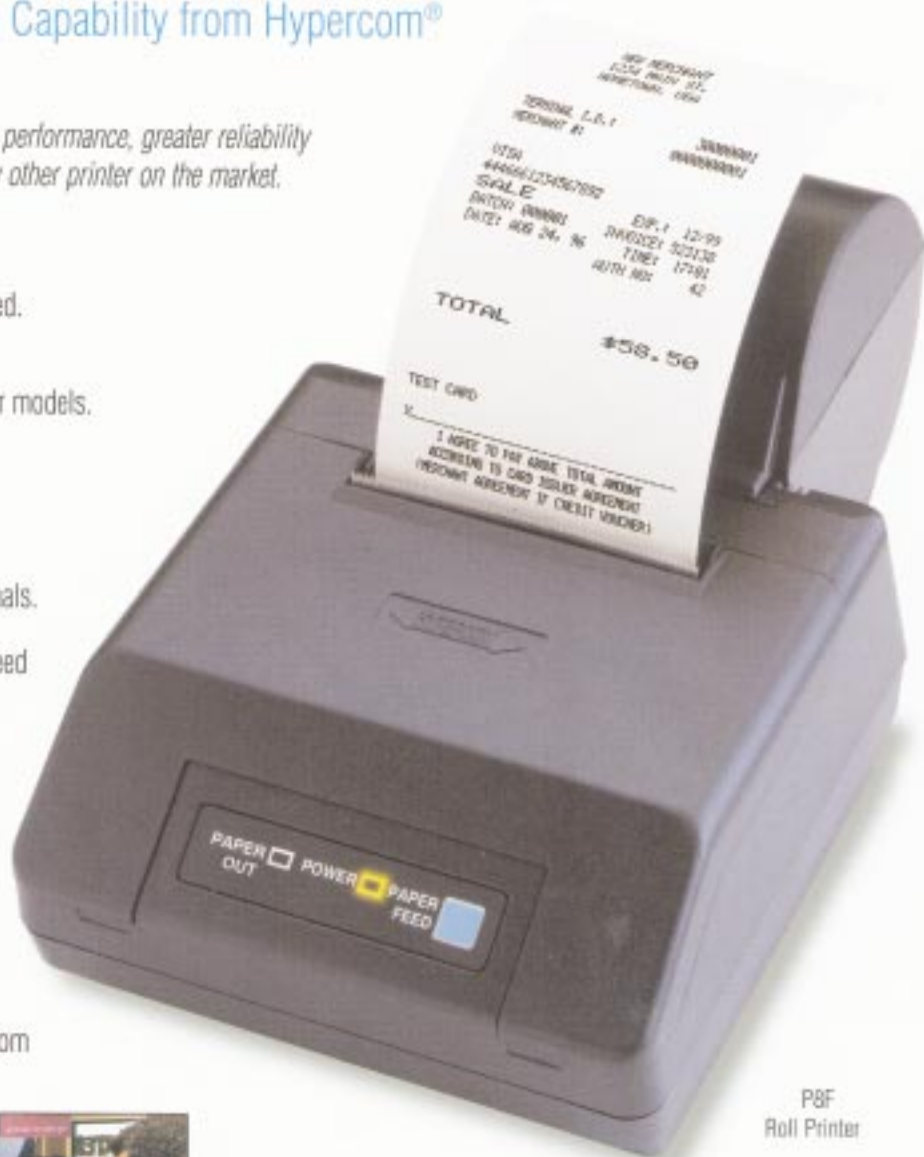

P8F  
Roll Printer

**HYPERCOM**®

*The Future of Transaction Technology*

**1-800-578-2436**

2851 W. Kathleen Road, Phoenix, AZ 85023  
Tel: (602) 504-5000 • Fax: (602) 504-4578

# P8 Printers

## Specifications

	<b>P8F</b> (Friction feed roll printer with 40 columns)	<b>P8S</b> (Sprocket feed with 23 columns)
<b>Paper</b>	3.0" (76mm - 3.35"/85mm max) 1, 2 or 3-ply carbonless	3.0" (76mm) 1, 2 or 3-ply carbonless
<b>Font</b>	7x7 impact dot matrix	5x7 impact dot matrix
<b>Print direction</b>	Bi-directional	Bi-directional
<b>Print speed</b>	4 lines per second	4 lines per second
<b>Feed speed</b>	13 lines per second	16 lines per second
<b>Character size (w/h)</b>	1.59/2.87mm	1.97/2.87mm
<b>Line spacing</b>	1/6"	1/6"
<b>Ribbon life (black)</b>	1,200,000 characters	1,200,000 characters
<b>Ribbon size</b>	13mm	13mm
<b>Operating temp</b>	0°C to +45°C (32°F - 113°F)	0°C to +45°C (32°F - 113°F)
<b>Printer reliability</b>	2,000,000 lines MTBF	2,000,000 lines MTBF
<b>Head life</b>	50,000,000 characters	50,000,000 characters
<b>ESD resistance</b>	12,000 volts	12,000 volts
<b>Ribbon</b>	RC2001B	RC2001B
<b>Star number</b>	30980120	30980120
<b>Dimension</b>	5.5"W x 9"L x 4.25"H	5.5"W x 8"L x 5"H
<b>Weight</b>	2.25 lbs	2.25 lbs
<b>Power</b>	24 Vdc, 1A supplied by terminal	24 Vdc, 1A supplied by terminal



### Corporate Office

2851 West Kathleen Rd. • Phoenix, Arizona 85063  
Tel: (602) 504-5000 • Fax: (602) 504-4578

**1-800-578-2436**

### International Regional Offices

Hypercom Asia / Pacific Rim  
Kowloon Bay, Hong Kong  
Tel: 852-2561-6800  
Fax: 852-2561-6800

Hypercom EMEA  
Surrey, England  
Tel: 44-1483-718600  
Fax: 44-1483-718601

Hypercom Latino America  
Miami, Florida  
Tel: (305) 477-0315  
Fax: (305) 477-4172

### Regional Sales Offices

Atlanta, GA  
Tel: (770) 641-7117  
Fax: (770) 645-4400

Chicago, IL  
Tel: (708) 301-0820  
Fax: (708) 301-0841

Los Angeles, CA  
Tel: (310) 455-0708  
Fax: (310) 455-2969

New York, NY  
Tel: (516) 676-5779  
Fax: (516) 676-5806